

Car DVD Loader DSV-810



* Mechanism

Slim Dimensional DVD mechanism(W x H x D : 143.0 x 23.0 x 128.4)
Disc loading motorized.
Optical Pick-up drive for DVD and CD compatibility
Roller loading and eject system
Detect Disc present using mechanical switch
Support any angle mounting
8cm disc support without adaptor

* Protections

2nd disc insertion protect.

* Integrated PWB

Using the one chip solution(CD/DVD frontend and backend solution with host processor).

Shock memory	DVD-Video, VCD, SVCD	1902Kbytes
	CD-DA, DTS-CD, HDCD, CDG	4364Kbytes
	Data (MP3,WMA,JPEG)	1706Kbytes
	Data (MPEG)	1706Kbytes
Temperature detection.	70°C	

* Interface

8V / 5V / 3.3V power supply
CVBS Video output
Y/C(S-Video) output
RGB Video output
UART(RXD, TXD and REQUEST) control interface
SPDIF digital audio output
Left Justified bus digital audio output (Optional : I²S bus digital audio output)
I²S bus digital audio input (Ibd : Optional)
CVBS Video input (Ibd : Optional)
Down mixed analog output L/R (output level : 1.5Vrms)
RS232C external MICOM interface.

* MultiRead

Capability to read	DVD Video (Single/Double layer)
	DVD Recordable, VIDEO CD
	CD Digital Audio(CD TEXT), CD Recordable
	CD ReWritable, MP3 Playback(ID3 TAG)
	HDCD, Hybrid SACD,
	SVCD

SPECIFICATIONS

Measuring conditions

according IEC68-1 part 5.5 standard conditions at DSV-810 unless otherwise stated

temperature	15°C to 35°C
relHumidity	45% to 75%
air pressure	860 mbar to 1060 mbar
rate voltage	8.0V power / 6.0V power / 3.3V power
test disc	TCD-792A, TDV-540A (DVS Korea : clean and undamaged)

Environmental Conditions

This Loader should be used under the conditions listed below

Temperature and Humidity

Operating Temperature	-20°C to 70°C
Storage Temperature	-40°C to 85°C
Operating Humidity	3% to 90%
Storage Humidity	3% to 90%
Condensation	No condensation of the conditions above

Vibration

Operating	No unrecoverable error 10-200Hz sine sweep rate in 1 octave/min 0.8G in Z direction 30 min/each direction
Non-Operating	No damage, No unrecoverable error 10-200Hz sine sweep rate in 1 octave/min 3G in X, Y and Z directions 30 min/axis

Shock

Non-Operating	No damage, No unrecoverable error 10 msec full sine wave 50G(490ms ²) : 1 time in each direction
---------------	--

Operating angle


The DSV-810 can operate any angle mounting.

Weight

DSV 810(Car DVD Loader) : typ. 480g

Mechanical dimensions

W x H x D : 143.0 x 23.0 x 128.4

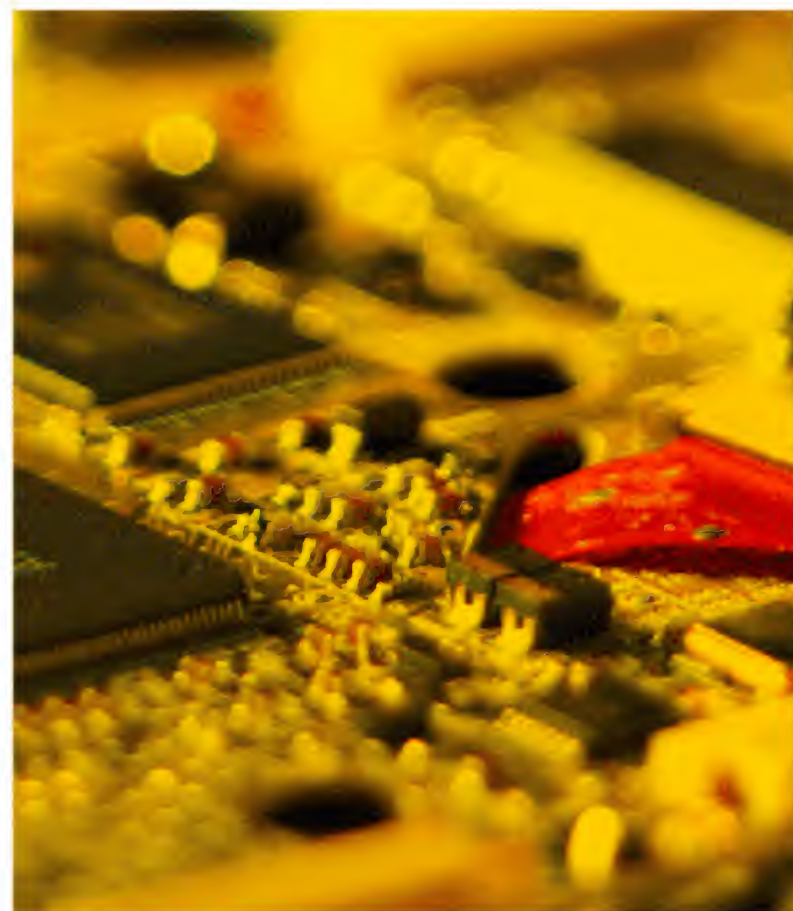

DVS Korea Co., Ltd.
5th, 7th & 8th Floor, KPS Bldg. 190 Gungok-dong Doosang-ku, Sungnam City Kyungki-do 463-720, Korea
Tel : 02-31-710-9800 / Fax 02-31-714-3012 <http://www.dvs.co.kr> / sales@dvs.co.kr

DVS America
1180 Aster Ave. Unit#F Sunnyvale, CA 94085 USA
Tel : 408-260-3001 / Fax : 408-260-3005 <http://www.dvsystems.com> / shaun@dvsystems.com